


CHANGE LETTER	DESCRIPTION	SER. NO.	BY:	DATE:
A	WAS 1800 CAP	.	KM	2-2-81
B	ADDED AR&W STAMP	.	KM	2-4-87
C	TRUE POS.	.	RP	5-27-97
D	ADDED V.G. OPTION	.	RP	10-13-00
E	E1- WAS SPOT WELDED	07-394	ML	7-9-07

OPTIONAL VALVE GUARD
PART NO. A050102
WHEEL NO. W40318V


(D)

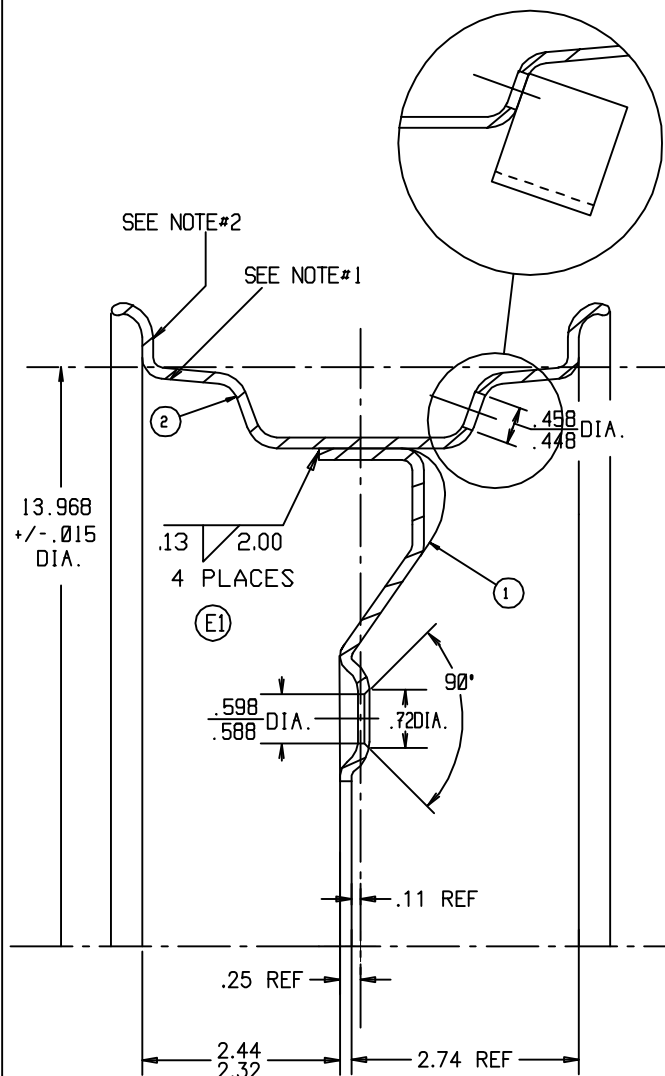

NOTE:

1. TOTAL RADIAL RUNOUT 1/16 MAX. (BOTH SIDES).
2. TOTAL LATERAL RUNOUT 5/64 MAX. (BOTH SIDES).
3. CAPACITY: 2000 LBS. AT 20 MILES PER HOUR.

(A)

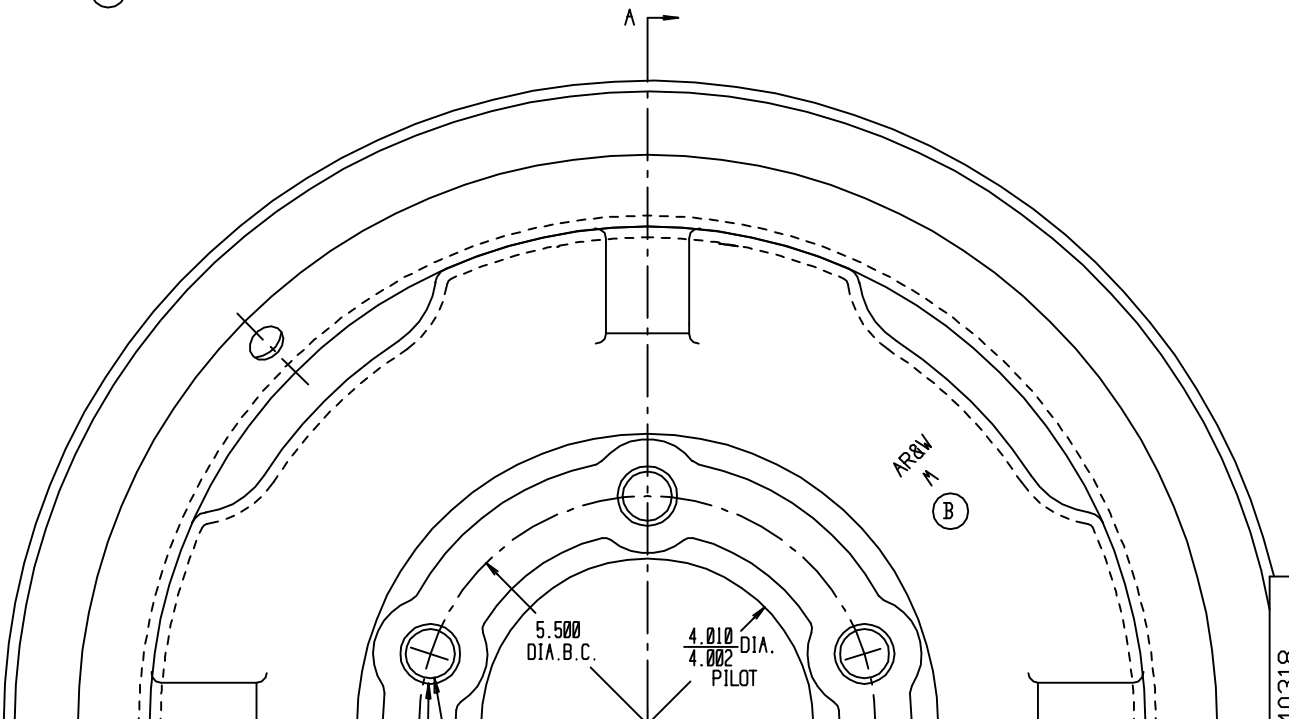


5 HOLES
EQUALLY SPACED

$\varnothing .020 \text{ (M)} \text{ (A)} \text{ (B)}$

CHAMFER 5 PLACES
EQUALLY SPACED

$\varnothing .015 \text{ (A)} \text{ (B)}$

(C)

1	2	R229130Z1	RIM	14 x 5KB	.130	
1	1	D377140	DISC	5-5.5-4	.140	
QTY.	ID	PART NO.	DESCRIPTION			MATERIAL
PARTS LIST						
TOLERANCE (UNLESS OTHERWISE SPECIFIED) DECIMAL: 1 PLACE +/- .030 2 PLACE +/- .015 3 PLACE +/- .005 ANGLES +/- 1 FRACTIONS +/-		KM	1-28-81		GKN Armstrong Wheels Armstrong, IA 50614	
		JH	3-4-81			
		MATERIAL		14 x 5KB WHEEL NON-REV. DISC 5HLS; 5-1/2BC; 4 PILOT 1/4" NEG. OFFSET		
		W40318			SHEET 1 OF 1 SCALE NONE	