
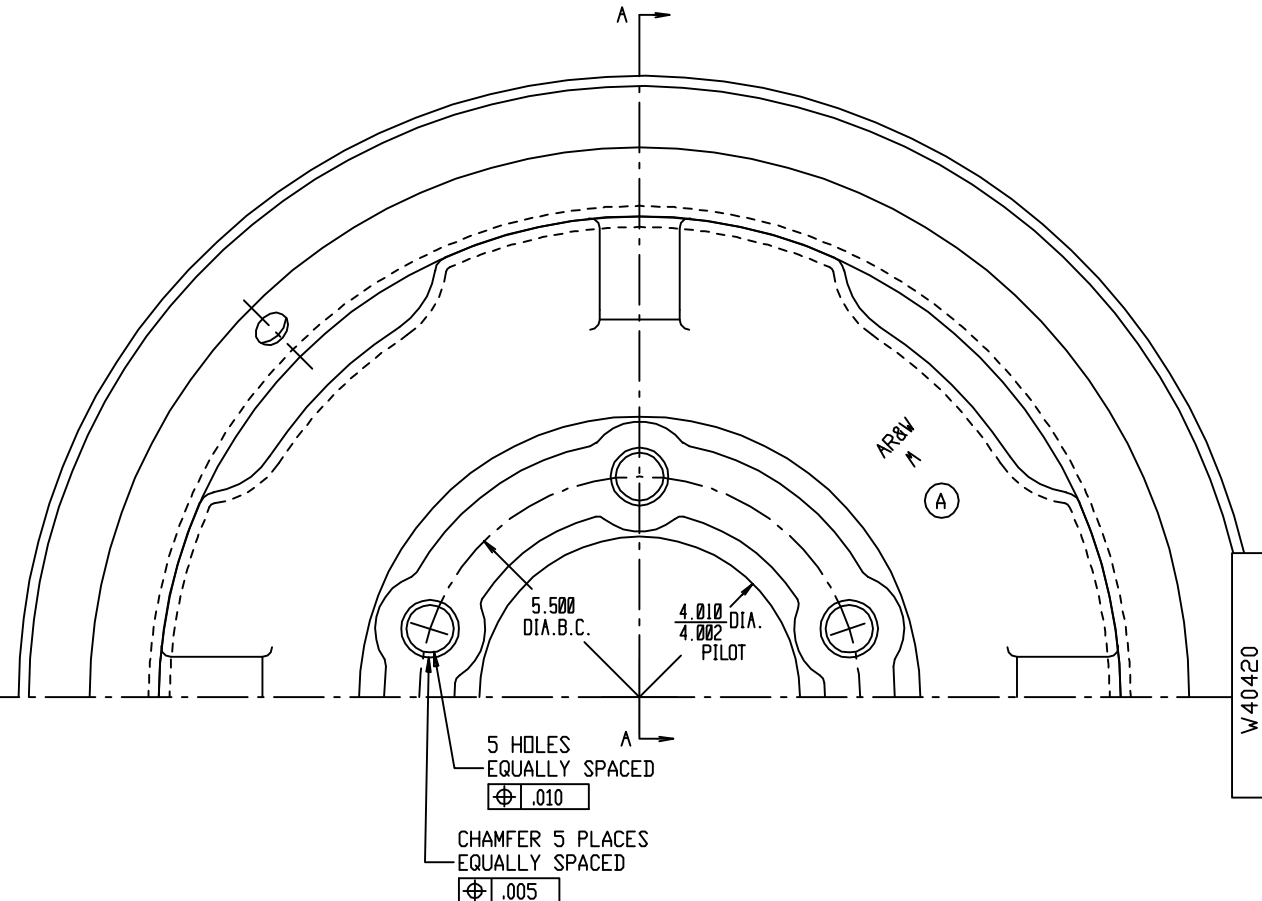


CHANGE LETTER	DESCRIPTION	BY:	SER	DATE:
A	ADDED AR&W STAMP	KM		2-4-87
B	CHANGED TO FILLET WELD	WIE	07-394	11-1-07

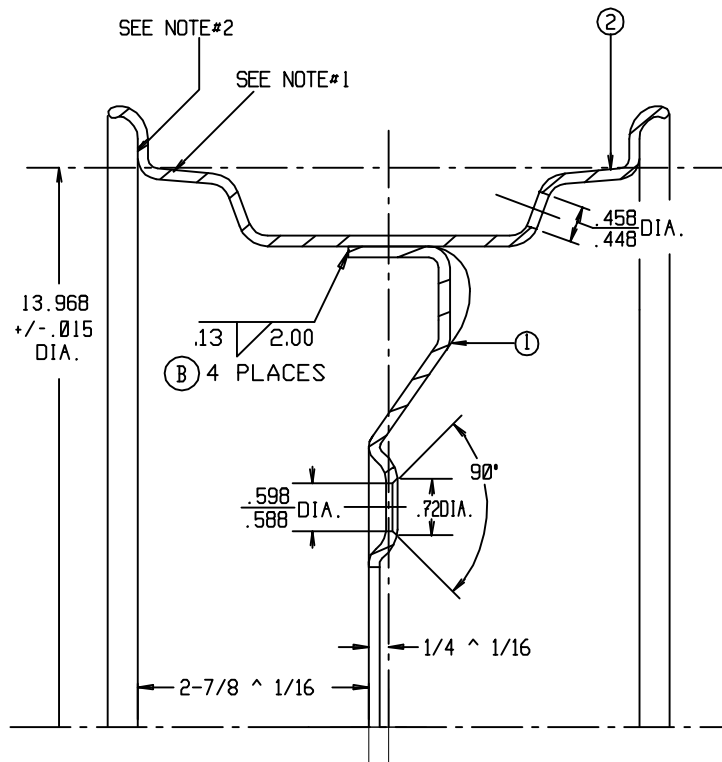

NOTE:

1. TOTAL RADIAL RUNOUT 1/16 MAX. (BOTH SIDES).
2. TOTAL LATERAL RUNOUT 5/64 MAX. (BOTH SIDES).
3. CAPACITY: 2000 LBS. AT 20 MILES PER HOUR.

1	2	R230130Z1	RIM	14 x 6KB	.130
1	1	D377140	DISC	5-5-1/2-4	.140
QTY.	ID	PART NO.	DESCRIPTION		MATERIAL
PARTS LIST					
TOLERANCE (UNLESS OTHERWISE SPECIFIED) DECIMAL: 1 PLACE +/- .030 2 PLACE +/- .015 3 PLACE +/- .005 ANGLES +/- 1 FRACTIONS +/-		KM	1-8-81	ARASTRONG RIM & WHEEL MFG. CO. ARMSTRONG IOWA 50514	
		JH	1-8-81		
				14 x 6KB WHEEL NON-REV. DISC 5HLS.-5.50BC; -4 PILOT 1/4" NEG. OFFSET	
		MATERIAL			
		W40420		SHEET 1 OF 1 SCALE NONE	